


EZP-LS Limited Space Precleaner

Big Features in a Small Package

Many conveyors and portables have tight space configurations. That means a belt cleaner must be small and compact to fit. The new EZP-LS Precleaner delivers a big cleaning job in a compact cleaner.

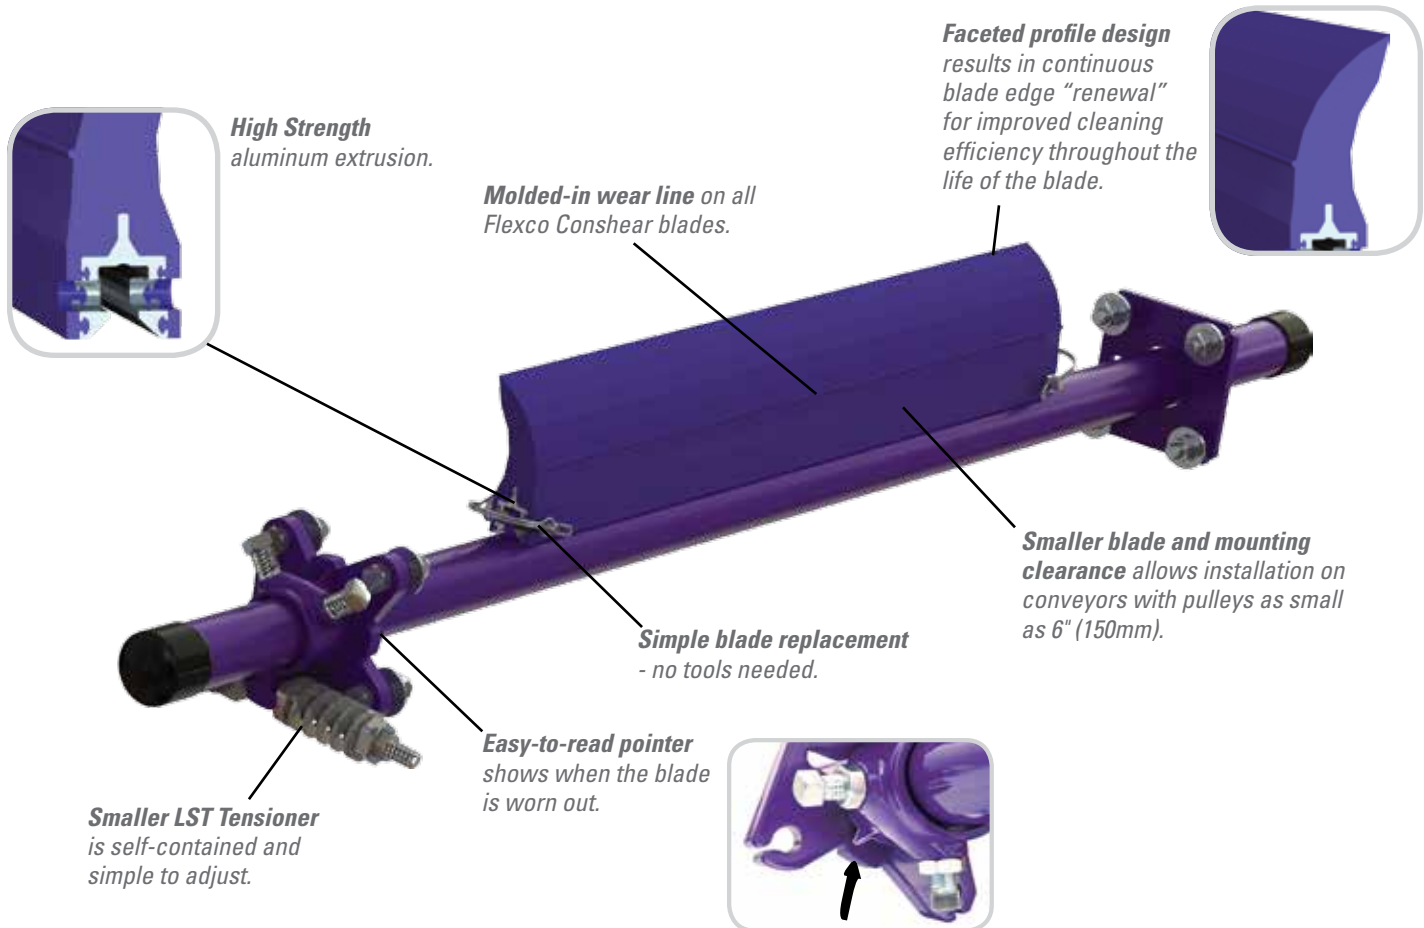

Features and Benefits

- **Quick-change blade.** No tools are needed. Just pull one pin, remove the old blade, slide in the new one and replace the pin.
- **Can be used on reversing belts.** Installing cleaners on both pulleys gives superior cleaning results on belts that run in both directions.
- **Can be ordered for special configurations.** Special order options include: a stainless steel pole for corrosive applications or a high temp ConShear™-LS Blade for applications with temperatures up to 275° F (135° C) with spikes to 325° F (163° C).
- **Blade can be used on other cleaners.** The ConShear-LS Blade can be used as a replacement blade on other OEM cleaners.




EZP-LS

Limited Space Precleaner

Specifications and Guidelines

- **Maximum Belt Speed**
500 FPM (2.5M/sec)
- **Max Temperature Rating**
-30° F to 180° F (-35° C to 82° C)
- **Minimum Pulley Diameter**
6" (150mm)
- **CEMA Cleaner Rating**
Class 2
- **Blade Height**
4-1/2" (115mm)
- **Usable Blade Wear Length**
2-3/8" (60mm)
- **Blade Material**
Urethane 83 durometer
(proprietary blend for abrasion resistance and long wear)
- **Available for Belt Widths**
12" to 60" (300 to 1500mm)
- **Horizontal Clearance Required**
3" (75mm)
- **Vertical Clearance Required**
6-1/2" (165mm)
- **Pole Length**
Cleaner size up to 42" (1050mm) + 30" (750mm) / Cleaner size 48" and up (1200mm) + 34" (850mm)
- **Maximum Conveyor Span**
Cleaner size up to 42" (1050mm) +25" (625mm) / Cleaner size 48" and up (1200mm) + 29" (725mm)

Pole Location Specs

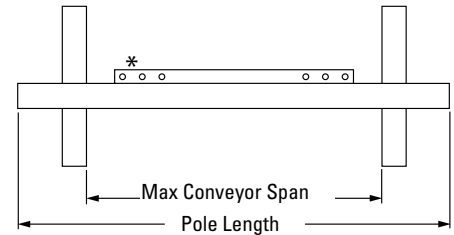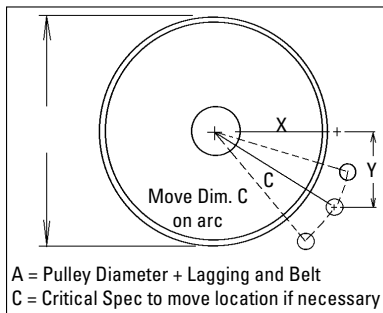

Pole Location Chart							
A	X	Y	C	A	X	Y	C
6"	2 5/8"	5 1/2"	6 1/8"	15"	7 5/8"	5 1/2"	9 3/8"
7"	3 1/4"	5 1/2"	6 3/8"	16"	8 1/4"	5 1/2"	9 7/8"
8"	3 7/8"	5 1/2"	6 3/4"	17"	8 3/4"	5 1/2"	10 3/8"
9"	4 3/8"	5 1/2"	7"	18"	9 1/4"	5 1/2"	10 3/4"
10"	5"	5 1/2"	7 3/8"	19"	9 3/4"	5 1/2"	11 1/4"
11"	5 1/2"	5 1/2"	7 3/4"	20"	10 1/4"	5 1/2"	11 5/8"
12"	6 1/8"	5 1/2"	8 1/4"	21"	10 3/4"	5 1/2"	12 1/8"
13"	6 5/8"	5 1/2"	8 5/8"	22"	11 1/4"	5 1/2"	12 1/2"
14"	7 1/8"	5 1/2"	9"				

Ordering Information

EZP-LS Precleaner Belth Width Minus 2"					
Belt Width		Blade Width		Ordering Number	Item Code
in.	mm	in.	mm		
12	300	10	250	EZP-LS212	77127
18	450	16	400	EZP-LS218	77128
24	600	22	550	EZP-LS224	77129
30	750	28	700	EZP-LS230	77130
36	900	34	850	EZP-LS236	77131
42	1050	40	1000	EZP-LS242	77132
48	1200	46	1150	EZP-LS248	77133
54	1350	52	1300	EZP-LS254	77134
60	1500	58	1450	EZP-LS260	77135

Lead time: 1 working day

EZP-LS Precleaner Belth Width Minus 8"					
Belt Width		Blade Width		Ordering Number	Item Code
in.	mm	in.	mm		
18	450	10	250	EZP-LS818	77136
24	600	16	400	EZP-LS824	77137
30	750	22	550	EZP-LS830	77138
36	900	28	700	EZP-LS836	77139
42	1050	34	850	EZP-LS842	77140
48	1200	40	1000	EZP-LS848	77141
54	1350	46	1150	EZP-LS854	77142
60	1500	52	1300	EZP-LS860	77143


Lead time: 1 working day

ConShear-LS Replacement Blades			
Blade Width		Ordering Number	Item Code
in.	mm		
10	250	CRB-LS10	77088
16	400	CRB-LS16	77089
22	550	CRB-LS22	77090
28	700	CRB-LS28	77091
34	850	CRB-LS34	77092
40	1000	CRB-LS40	77093
46	1150	CRB-LS46	77094
52	1300	CRB-LS52	77095
58	1450	CRB-LS58	77096

Other blade sizes available upon request.
Lead time: 1 working day

Distribution in Europe by:

Flexco Europe GmbH • Leidringer Strasse 40-42 • D-72348 Rosenfeld • Germany
Phone: +49-7428-9406-0 • Fax: +49-7428-9406-260 • E-mail: europe@flexco.com • Web: www.flexco.com

 2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2016 Flexible Steel Lacing Company. 01/16 For reorder: X2501

Authorized Distributor:

